

### Features

- Includes tamper resistant locking nut to prevent accidental misadjustment.
- Built-in check valves prevent migration of hot water to cold and cold water to hot water piping.
- Provided with cap for three port application.
- Integral strainer with 40 mesh stainless steel screens to filter.

### Material

- Lead Free\* Brass body construction.

### Installation

- Installs easily between the stop valves and faucet.




### Codes/Standards

ASSE 1070  
NSF/ANSI 61  
NSF/ANSI 372

### KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

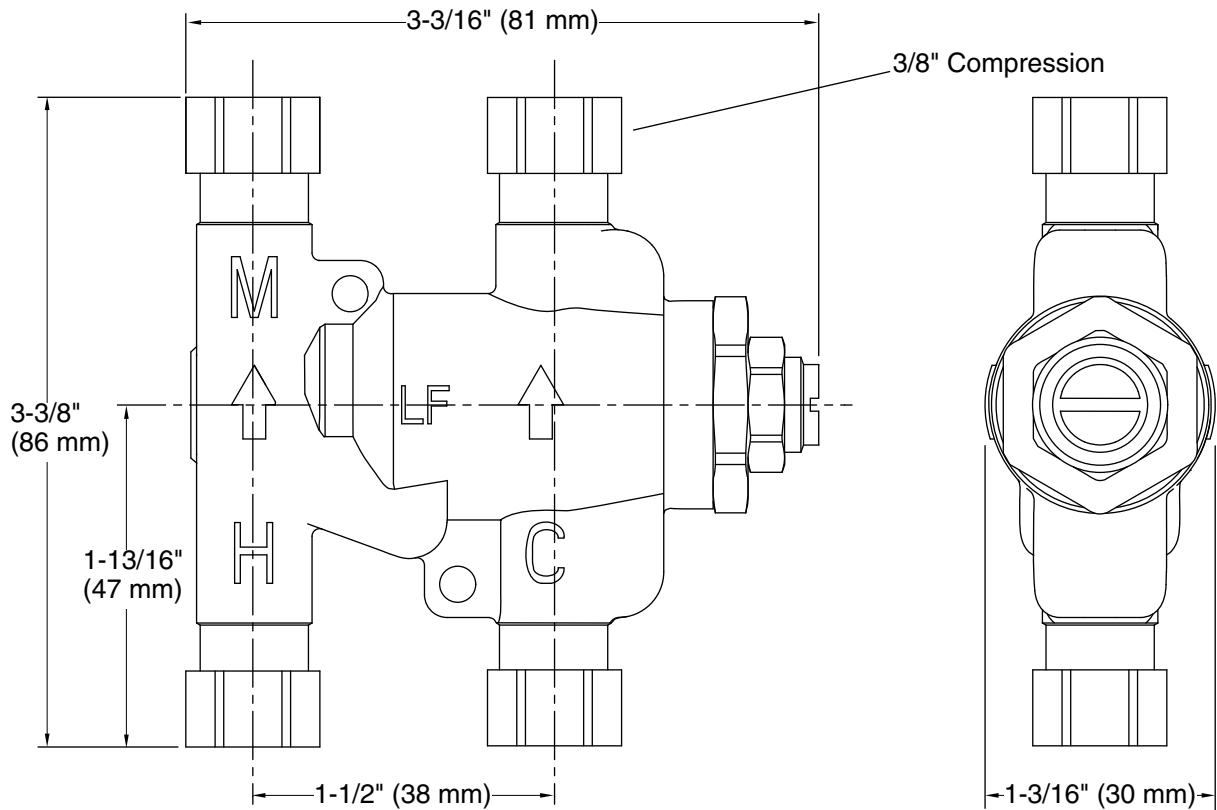

### Technical Information

All product dimensions are nominal.

#### Faucet:

|                 |                         |
|-----------------|-------------------------|
| Flow rate:      | 0.5 gal/min (1.9 l/min) |
| Pressure:       | 60 psi (4.1 bar)        |
| Valve body:     | Cast brass              |
| Drain included: | No                      |

### Notes

Install this product according to the installation guide.